

GLY

空壓通用



SAKAGAMI 阪上製作所

產品介紹：活塞和活塞桿雙用的橡膠密封件，不能用於潤滑氣缸，因為它僅用於非潤滑。

主密封材料：防滑橡膠（特種複合丁腈橡膠）

溫度範圍：-25~70 °C

壓力：10 bar

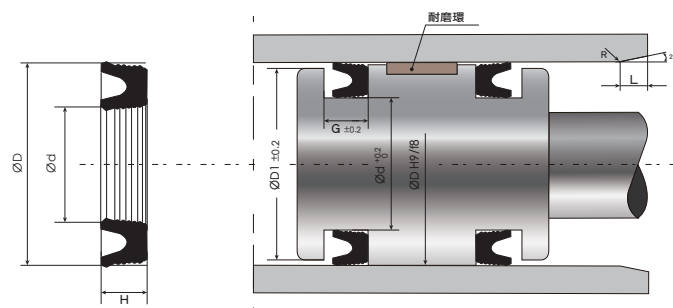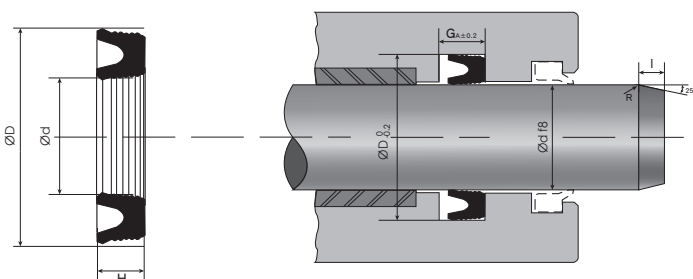

編號 Code No.	內徑 d	外徑 D	高度 H
GLY-10	10	18	5
GLY-12	12	20	5
GLY-14	14	22	5
GLY-16	16	24	5
GLY-17	17	25	5
GLY-18	18	26	5
GLY-20	20	28	5
GLY-22.4	22.4	30	5
GLY-25	25	33	5
GLY-27	27	35	5
GLY-28	28	36	5
GLY-30	30	40	6
GLY-31.5	31.5	41.5	6
GLY-32	32	42	6
GLY-35	35	45	6
GLY-35.5	35.5	45.5	6
GLY-36	36	46	6
GLY-40	40	50	6

編號 Code No.	內徑 d	外徑 D	高度 H
GLY-45	45	55	6
GLY-50	50	60	6
GLY-53	53	63	6
GLY-55	55	65	6
GLY-60	60	70	6
GLY-63	63	73	6
GLY-65	65	75	6
GLY-70	70	80	6
GLY-75	75	85	6
GLY-80	80	90	6
GLY-85	85	100	9
GLY-95	95	110	9
GLY-100	100	115	9
GLY-105	105	120	9
GLY-110	110	125	9
GLY-115	115	130	9
GLY-125	125	140	9
GLY-135	135	150	9

編號 Code No.	內徑 d	外徑 D	高度 H
GLY-145	145	160	9
GLY-160	160	175	9
GLY-165	165	180	9
GLY-175	175	190	9
GLY-180	180	200	12
GLY-185	185	205	12
GLY-200	200	220	12
GLY-215	215	235	12
GLY-230	230	250	12
GLY-240	240	260	12

[illegible]