

# KY

## 油壓雙用





產品介紹：活塞和活塞桿雙用密封件。大截面密封件可用於大範圍的壓力，有極好的耐磨性和密封能力，適用於廣泛的運用。

主密封材料：丁腈橡膠 NBR

溫度範圍：-10 ~ 80 °c

壓力：150 bar / 加墊片 (BRT)：300 bar / 加 BRT+C2：350 bar

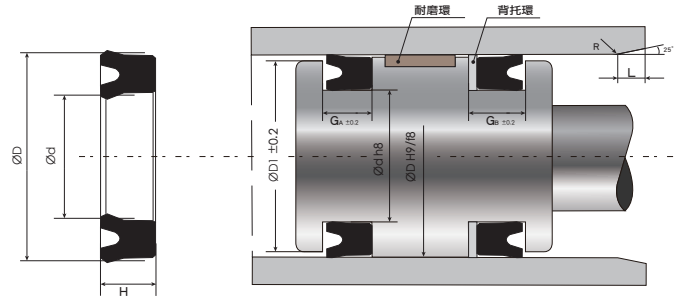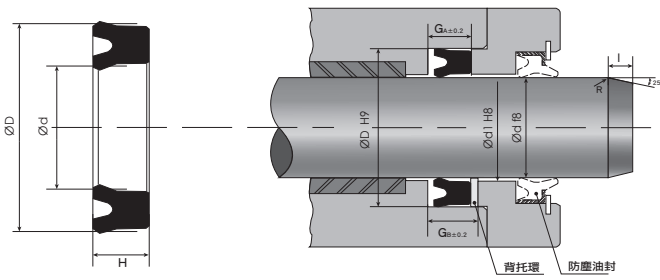

編號 Code No.	內徑 d	外徑 D	高度 H
KY-6.3	6.3	16.3	7.5
KY-7.1	7.1	17.1	7.5
KY-8	8	18	7.5
KY-9	9	19	7.5
KY-10	10	20	7.5
KY-11.2	11.2	21.2	7.5
KY-12.5	12.5	22.5	7.5
KY-14	14	24	7.5
KY-15	15	25	6.5
KY-15	15	28	10
KY-16	16	26	7.5
KY-18	18	28	8
KY-18	18	31	10
KY-18.5	18.5	31.5	10
KY-20	20	33	10
KY-20	20	35	9.5
KY-22	22	35	8
KY-22	22	35	10
KY-22.4	22.4	35.4	10

編號 Code No.	內徑 d	外徑 D	高度 H
KY-25	25	35	8
KY-25	25	38	10
KY-27	27	40	10
KY-28	28	40	10
KY-28	28	41	10
KY-30	30	43	10
KY-30	30	45	10
KY-31.5	31.5	44.5	10
KY-32	32	45	10
KY-32 特	32	46	10
KY-34	34	50	12
KY-35	35	50	10
KY-35	35	50	12
KY-35A	35	51	12
KY-35.5	35.5	51.5	12
KY-36	36	52	12
KY-40	40	55	10
KY-40	40	56	12
KY-40	40	60	12

編號 Code No.	內徑 d	外徑 D	高度 H
KY-44	44	60	12
KY-45	45	60	10
KY-45	45	60	12
KY-45	45	61	12
KY-47	47	63	12
KY-48 特	48	63	10
KY-50	50	65	10
KY-50	50	66	12
KY-50	50	70	12
KY-53	53	69	12
KY-54	54	70	12
KY-55	55	71	12
KY-55	55	72	12
KY-55	55	75	12
KY-55	55	80	15
KY-56	56	72	12
KY-60	60	76	12
KY-60	60	80	12
KY-63	63	79	12
KY-64	64	80	12
KY-65	65	81	12
KY-65 特	65	85	12
KY-67	67	87	15
KY-70	70	90	12
KY-70	70	90	15
KY-71	71	91	15
KY-75	75	95	12
KY-75	75	95	15
KY-80	80	100	12
KY-80	80	100	15
KY-85	85	105	12
KY-85	85	105	15
KY-90	90	110	12
KY-90	90	110	15
KY-92	92	112	15
KY-95	95	115	15
KY-100 特	100	120	12
KY-100	100	120	15
KY-100	100	125	15
KY-105	105	125	15
KY-106	106	126	15

編號 Code No.	內徑 d	外徑 D	高度 H
KY-110	110	130	15
KY-112	112	132	15
KY-115	115	135	15
KY-118	118	138	15
KY-120	120	140	15
KY-125	125	150	19
KY-130	130	150	15
KY-130	130	155	19
KY-132	132	157	19
KY-135	135	155	16
KY-135	135	160	15.7
KY-135	135	160	19
KY-140	140	160	15
KY-140	140	165	19
KY-145	145	170	19
KY-150	150	175	19
KY-155	155	180	15.7
KY-155	155	180	19
KY-160	160	185	19
KY-165	165	190	19
KY-170	170	195	19
KY-175	175	200	15.7
KY-175	175	200	19
KY-180	180	205	19
KY-190	190	215	19
KY-195	195	220	19
KY-199	199	224	15.7
KY-199	199	224	19
KY-200	200	225	19
KY-205	205	230	19
KY-210	210	235	18
KY-210	210	235	19
KY-212	212	237	19
KY-215	215	240	19
KY-220	220	250	18
KY-224	224	249	19
KY-225	225	250	18
KY-225	225	250	19
KY-230	230	255	19
KY-235	235	260	19
KY-236	236	261	19

