



SPGI

油壓外徑用


NOK株式會社

產品介紹：四角型設計，液壓活塞專用密封件，建設機械用。

主密封材料：聚氨酯 (PU) + 丁腈橡膠 (NBR)

溫度範圍：-40~80 °c

壓力：210 bar

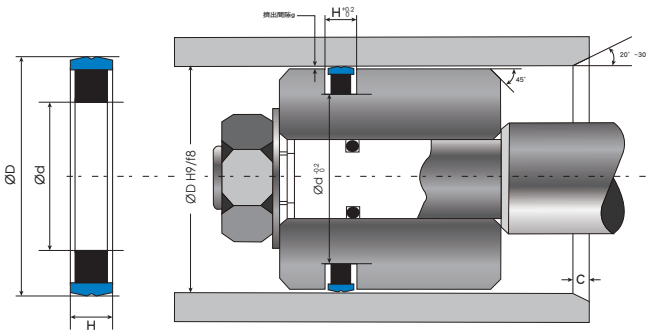

編號 Code No.	外徑 D	內徑 d	高度 H
SPGI-250	250	228	10.8

編號 Code No.	外徑 D	內徑 d	高度 H
SPGI-30	30	20.5	4.3
SPGI-31.5	31.5	22	4.3
SPGI-32	32	22.5	4.3
SPGI-40	40	30	4.3
SPGI-50	50	40	4.3
SPGI-63	63	48	7.3
SPGI-70	70	55	7.3
SPGI-75	75	60	7.3
SPGI-80	80	65	7.3
SPGI-100	100	85	7.3
SPGI-125	125	109	7.3
SPGI-140	140	124	7.3
SPGI-160	160	144	7.3
SPGI-180	180	158	10.8
SPGI-200	200	178	10.8
SPGI-220	220	198	10.8
SPGI-224	224	202	10.8