



TDE


油壓外徑用

產品介紹：三件組雙向活塞密封件，建設機械用。POM 優點為耐磨性高、摩擦係數低、耐熱性高、良好的電氣和介電性能、吸水率低

主密封材料：丁腈橡膠 (NBR) + 帆布 + 聚甲醛 (POM)

溫度範圍：-30~100 °c

壓力：450 bar

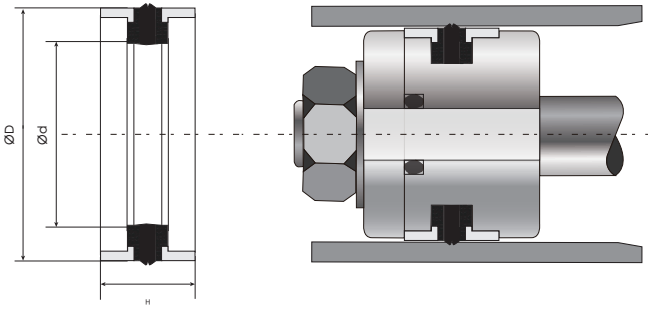

編號 Code No.	外徑 D	內徑 d	高度 H
TDE-50	50	34	18.4
TDE-55	55	39	18.4
TDE-60	60	44	18.4
TDE-63	63	47	18.4
TDE-65	65	50	18.4
TDE-70	70	50	22.4
TDE-75	75	55	22.4
TDE-80	80	60	22.4
TDE-85	85	65	22.4
TDE-90	90	70	22.4
TDE-95	95	75	22.4
TDE-100	100	75	22.4
TDE-100	100	80	25.4
TDE-105	105	80	22.4
TDE-110	110	85	22.4
TDE-110	110	85	25.4
TDE-110	110	90	25.4

編號 Code No.	外徑 D	內徑 d	高度 H
TDE-115	115	90	22.4
TDE-120	120	95	22.4
TDE-120	120	100	25.4
TDE-125	125	100	25.4
TDE-125	125	100	32.4
TDE-125	125	105	25.4
TDE-130	130	105	25.4
TDE-135	135	110	25.4
TDE-140	140	115	25.4
TDE-140	140	120	25.4
TDE-145	145	120	25.4
TDE-150	150	120	38.4
TDE-150	150	125	25.4
TDE-160	160	130	25.4
TDE-170	170	140	25.4
TDE-180	180	150	35.4